



RAH12

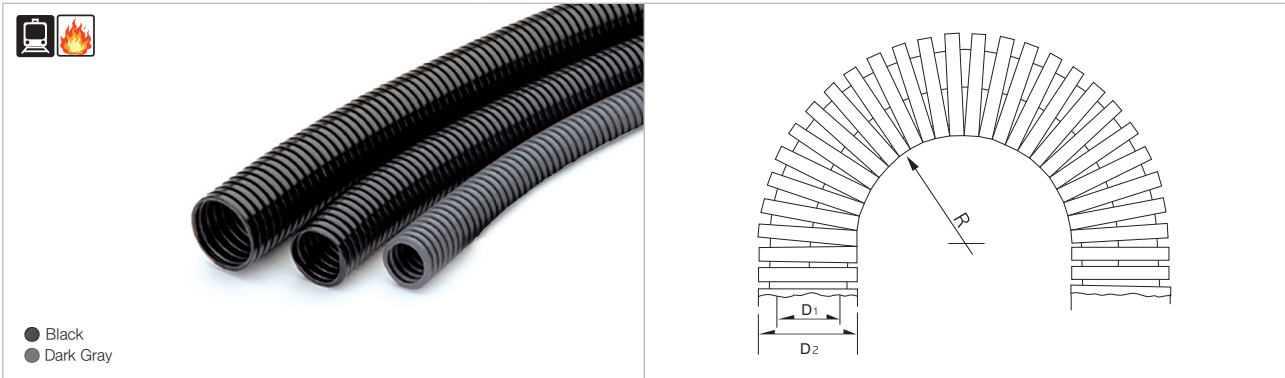

- Material : High Quality Polyamide 12 (PA12)
- Construction : Inside & Outside Corrugated all Plastic Hose
- Degrees of Protection : IP 68 (EN 60529)
- Temperature Range : -40°C ~ +125°C
- Short Term : +150°C
- Self-Extinguishing : UL94-V0
- Color : Black & Dark Gray
- Structure : CPSFIX
- Application : Railroad cars
- International Specification : EN45545-2 HL2(R22)/HL3(R23)
- Certification : RoHS2, CE

Product Size

• Standard Pitch : Excellent Pull-out Performance



| Black | Dark Gray | Ultraviolet Block UV-R | Inner Diameter (D1) | Outer Diameter (D2) | Bending Radius(R) mm ± 10% | Packing meter / roll |
|-----------|-----------|------------------------|---------------------|---------------------|----------------------------|----------------------|
| RAH12-07B | RAH12-07G | RAH12-07U | 6.4 | 10.0 | 15.0 | 100 |
| RAH12-10B | RAH12-10G | RAH12-10U | 9.6 | 13.0 | 20.0 | 100 |
| RAH12-12B | RAH12-12G | RAH12-12U | 11.8 | 15.8 | 30.0 | 100 |
| RAH12-16B | RAH12-16G | RAH12-16U | 17.0 | 21.2 | 40.0 | 100 |
| RAH12-22B | RAH12-22G | RAH12-22U | 23.0 | 28.5 | 45.0 | 50 |
| RAH12-28B | RAH12-28G | RAH12-28U | 29.0 | 34.5 | 55.0 | 50 |
| RAH12-36B | RAH12-36G | RAH12-36U | 36.0 | 42.5 | 60.0 | 25 |
| RAH12-48B | RAH12-48G | RAH12-48U | 48.0 | 54.5 | 70.0 | 25 |

(Dimensions in mm)