



PNCC IP68

※ 가스켓 & Lock-Nut 포함

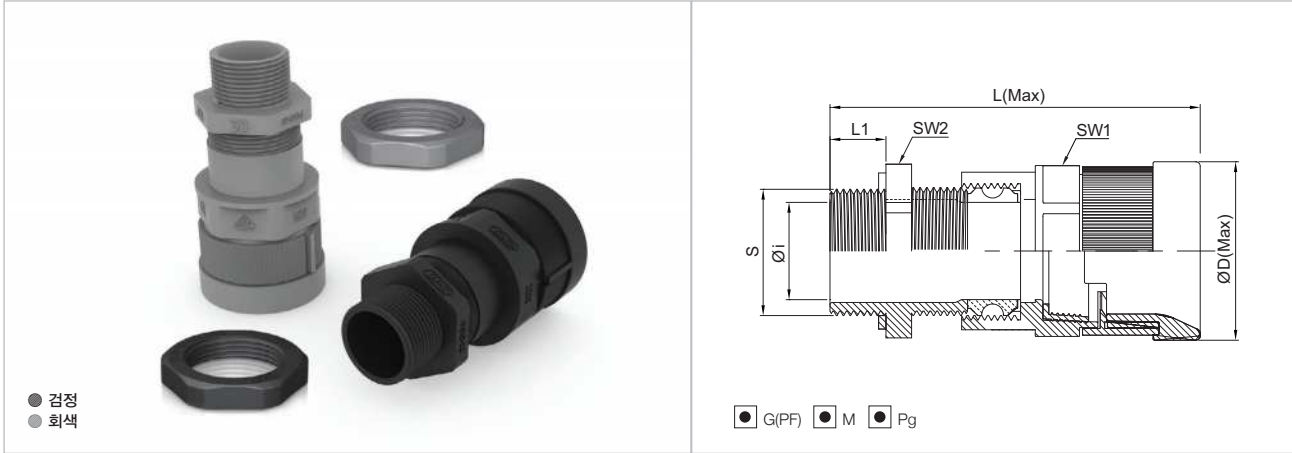

- 재 질 : 고품질 폴리아미드 6 (PA6)
- 방 수 등 급 : IP68 (EN 60529)
- 적 용 온 도 범 위 : -40℃ ~ +105℃
- 순 간 최 대 온 도 : +150℃
- 자 기 소 화 성 : UL94-HB, 할로겐/카드뮴 발생 없음
- 색 상 : 검정, 회색
- 적 용 : 철도차량, 공작기계, 산업기계, 자동화기계, 조선소 등
기계의 진동으로 발생하는 케이블의 단선을 방지하기 위해 사용되는 커넥터

제품사이즈




PF Thread (JIS B0202)

(단위 : mm)

검정	회색	나사(inch)	튜브사이즈	Øi(최소)	Øi(최대)	S	L1	L	ØD	SW1	SW2
PNCC-G10B	PNCC-G10G	G1/2	10	3.5	7.0	20.4	15.0	70.6	24.2	19.7	22.6
PNCC-G12B	PNCC-G12G	G1/2	12	4.0	9.0	20.4	15.0	72.0	27.6	22.8	25.5
PNCC-G16B	PNCC-G16G	G1/2	16	6.2	13.4	20.4	15.0	75.2	33.0	28.0	25.5
PNCC-G1622B	PNCC-G1622G	G1/2	22	11.0	19.5	20.4	15.0	88.9	43.0	37.5	34.0
PNCC-G22B	PNCC-G22G	G3/4	22	11.0	19.5	25.8	15.0	89.0	43.0	37.5	34.0
PNCC-G228B	PNCC-G228G	G3/4	28	15.2	26.5	26.2	15.0	98.5	49.0	43.0	43.2
PNCC-G28B	PNCC-G28G	G1	28	17.0	26.5	32.3	15.0	95.6	48.4	43.0	43.2

PNCC IP68



Metric Thread (EN 60423)

(단위 : mm)

검정	회색	나사	튜브사이즈	Ø i(최소)	Ø i(최대)	S	L1	L	ØD	SW1	SW2
PNCC-M10B	PNCC-M10G	M12 X 1.5	10	3.8	7.0	11.8	15.0	71.3	24.2	19.7	22.6
PNCC-M120B	PNCC-M120G	M16 X 1.5	10	3.8	7.0	15.8	15.0	70.5	24.2	19.7	22.6
PNCC-M102B	PNCC-M102G	M12 X 1.5	12	4.0	9.0	11.8	15.0	72.5	27.6	22.8	25.5
PNCC-M12B	PNCC-M12G	M16 X 1.5	12	4.0	9.0	15.8	15.0	72.5	27.6	22.8	25.5
PNCC-M162B	PNCC-M162G	M20 X 1.5	12	4.0	9.0	19.8	15.0	72.5	27.6	22.8	25.5
PNCC-M126B	PNCC-M126G	M16 X 1.5	16	8.5	13.4	15.8	15.0	75.8	33.0	28.0	25.5
PNCC-M16B	PNCC-M16G	M20 X 1.5	16	8.5	13.4	19.8	15.0	75.5	33.0	28.0	25.5
PNCC-M1622B	PNCC-M1622G	M20 X 1.5	22	11.0	19.5	19.8	15.0	90.0	43.0	37.5	34.0
PNCC-M22B	PNCC-M22G	M25 X 1.5	22	11.0	19.5	24.7	15.0	89.0	43.0	37.5	34.0
PNCC-M228B	PNCC-M228G	M25 X 1.5	28	17.5	19.5	24.7	15.0	96.0	48.4	43.0	43.2
PNCC-M28B	PNCC-M28G	M32 X 1.5	28	18.0	26.5	31.7	15.0	96.0	48.4	43.0	43.2

Pg Thread (DIN 40430)

(단위 : mm)

검정	회색	나사	튜브사이즈	Ø i(최소)	Ø i(최대)	S	L1	L	ØD	SW1	SW2
PNCC-P07B	PNCC-P07G	Pg07	10	3.5	7.0	12.3	15.0	72.3	25.0	19.7	22.6
PNCC-P09B	PNCC-P09G	Pg09	10	3.5	7.0	14.9	15.0	70.8	24.2	19.7	22.6
PNCC-P072B	PNCC-P072G	Pg07	12	3.8	8.0	12.3	15.0	73.0	27.6	22.8	25.5
PNCC-P092B	PNCC-P092G	Pg09	12	4.0	9.0	14.9	15.0	73.0	27.6	22.8	25.5
PNCC-P11B	PNCC-P11G	Pg11	12	4.0	9.0	18.3	15.0	72.4	27.6	22.8	25.5
PNCC-P132B	PNCC-P132G	Pg13.5	12	4.0	9.0	20.2	15.0	73.5	27.6	22.8	25.5
PNCC-P162B	PNCC-P162G	Pg16	12	4.0	9.0	22.3	15.0	73.5	27.6	22.8	25.5
PNCC-P096B	PNCC-P096G	Pg09	16	7.0	13.4	14.9	15.0	77.5	33.0	28.0	25.5
PNCC-P116B	PNCC-P116G	Pg11	16	6.2	13.4	18.3	15.0	75.4	33.0	28.0	25.5
PNCC-P13B	PNCC-P13G	Pg13.5	16	6.2	13.4	20.0	15.0	75.6	33.0	28.0	25.5
PNCC-P16B	PNCC-P16G	Pg16	16	7.0	13.4	22.3	15.0	77.5	33.0	28.0	25.5
PNCC-P122B	PNCC-P122G	Pg11	22	12.0	19.5	18.3	15.0	90.0	43.0	37.5	34.0
PNCC-P1322B	PNCC-P1322G	Pg13.5	22	12.0	19.5	20.2	15.0	90.0	43.0	37.5	34.0
PNCC-P1622B	PNCC-P1622G	Pg16	22	11.5	17.3	22.3	15.0	90.0	43.0	37.5	34.0
PNCC-P21B	PNCC-P21G	Pg21	22	11.0	19.0	28.0	15.0	90.0	43.0	37.5	34.0
PNCC-P218B	PNCC-P218G	Pg21	28	17.0	26.5	28.0	15.0	97.5	49.0	43.0	43.2
PNCC-P29B	PNCC-P29G	Pg29	28	17.0	26.5	36.8	15.0	98.5	49.0	43.0	43.2