



# SWC IP67

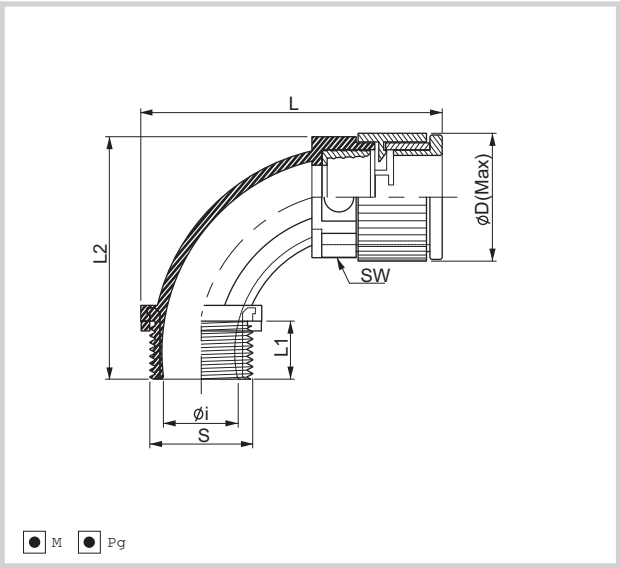

- 재 질 : 고품질 폴리아미드 6 + 황동니켈도금
- 방 수 등 급 : IP 67 (EN 60529)
- 적용 온도 범위 : -40°C ~ +105°C
- 순간 최대 온도 : +150°C
- 자 기 소 화 성 : UL94-HB, 할로겐/카드뮴 발생 없음
- 색 상 : 검정색, 회색
- 적 용 : 진동이 큰 철도차량에 사용되는 커넥터.

## 제품사이즈



### Pg Thread (DIN 40430)

(단위 : mm)

검정색	회색	나사	튜브사이즈	S	L <sub>1</sub>	L <sub>2</sub>	L	Ø <sub>i</sub>	Ø <sub>b</sub>	SW
SWC-P077B	SWC-P077G	Pg07	07	12.5	11	33	41	6	17	14.2
SWC-P09B	SWC-P09G	Pg09	10	15.2	13	53	62	8	25	19.8
SWC-P11B	SWC-P11G	Pg11	12	18.6	13	53	60	9	25	22.7
SWC-P136B	SWC-P136G	Pg13.5	16	20.4	13	62	66	12	30	28.0
SWC-P16B	SWC-P16G	Pg16	16	22.5	13	62	66	12	30	28.0
SWC-P21B	SWC-P21G	Pg21	22	28.3	15	71	81	18	41	37.5
SWC-P29B	SWC-P29G	Pg29	28	37.0	15	77	96	25	47	43.0
SWC-P36B	SWC-P36G	Pg36	36	47.0	19	97	119	31	56	52.2
SWC-P48B	SWC-P48G	Pg48	48	59.3	19	112	141	42	68	64.1

### Metric Thread (EN 60423)

(단위 : mm)

검정색	회색	나사	튜브사이즈	S	L <sub>1</sub>	L <sub>2</sub>	L	Ø <sub>i</sub>	Ø <sub>b</sub>	SW
SWC-M107B	SWC-M107G	M12 X 1.5	07	12	11	33	41	6	17	14.2
SWC-M10B	SWC-M10G	M12 X 1.5	10	12	13	53	62	6	25	19.8
SWC-M12B	SWC-M12G	M16 X 1.5	12	16	13	53	60	9	25	22.7
SWC-M16B	SWC-M16G	M20 X 1.5	16	20	13	62	66	12	30	28.0
SWC-M22B	SWC-M22G	M25 X 1.5	22	25	15	71	81	16	41	37.5
SWC-M28B	SWC-M28G	M32 X 1.5	28	32	15	77	96	23	47	43.0
SWC-M36B	SWC-M36G	M40 X 1.5	36	40	19	97	119	31	56	52.2
SWC-M48B	SWC-M48G	M50 X 1.5	48	50	19	112	141	41	68	64.1