



ST095RS

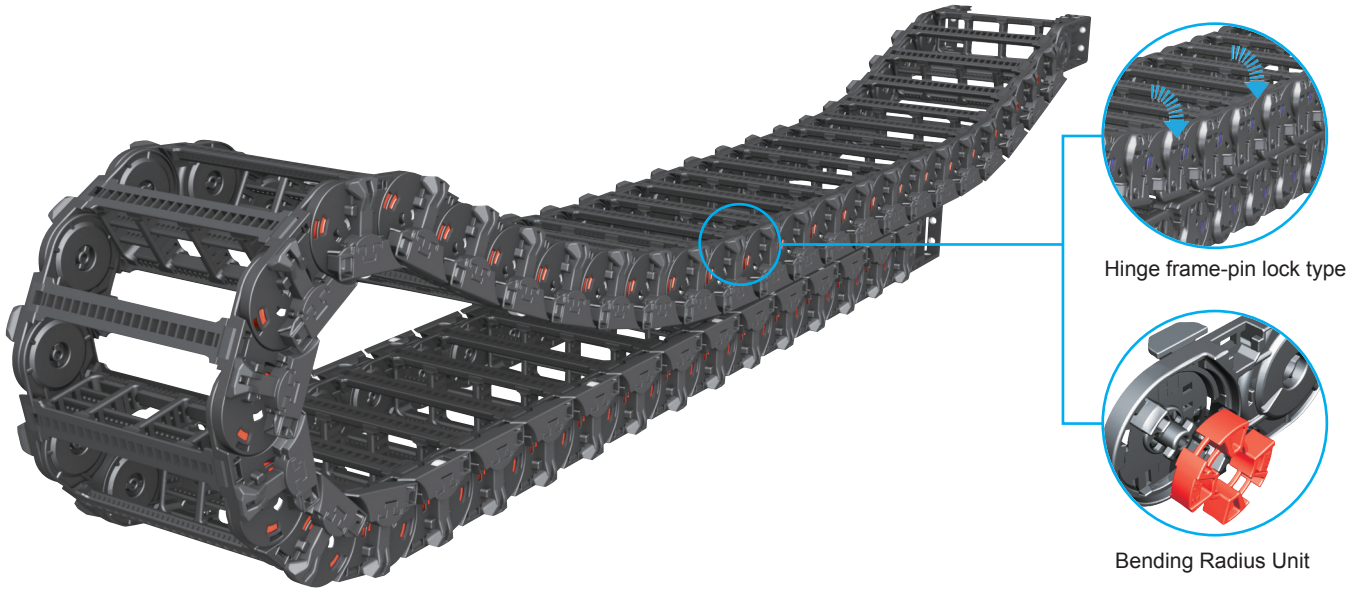


Layout of the Chain

Ls: Stroke

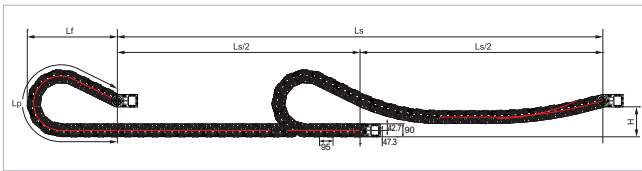


Bending Radius(R)	Lp Loop Length	Lf Loof Projection	H Moving Height
135	1,091	504	210
150	1,178	534	
200	1,479	634	
230	1,666	694	
280	2,146	889	
400	3,232	1,319	

Chain Cross Section

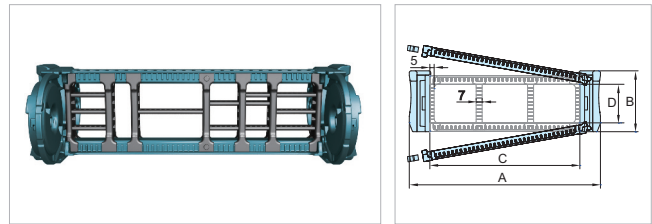


Chain Type	A Width(Outer)	B Height(Outer)	C Frame Width(Inner)	D Height(Inner)	Weight kg/m
ST095RS	143	90	75	56	3,48
	168		100		3,55
	193		125		3,73
	218		150		3,84
	243		175		3,96
	258		190		4,07
	268		200		4,14
	298		230		4,30
	308		240		4,36
	318		250		4,41
	368		300		4,67
	418		350		5,03
468	400	5,43			


Dividers(DV)

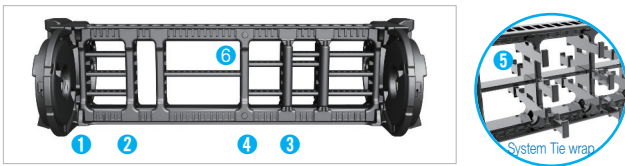

Assemble divider every second frame
 DV/T : Applied to Frame 250~400
 DV/M : Normal Divider
 DV/W : Applicable to System Tie Wrap or FEB

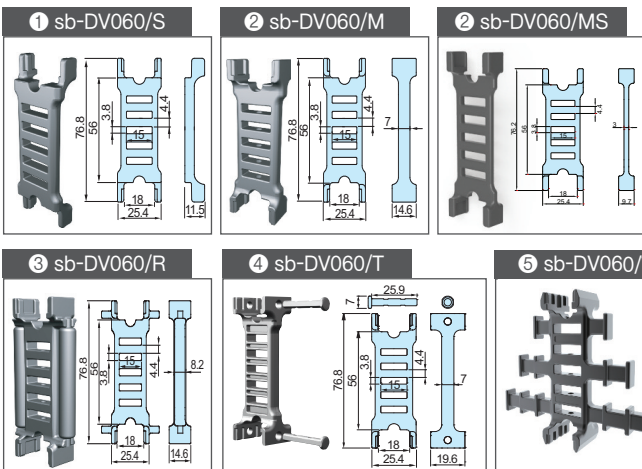

Separators(SP)

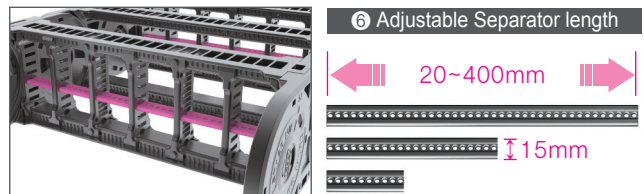

Chain Type	Ordering No.
ST095RS	sb-SP/400,Frame

