



ST120RS

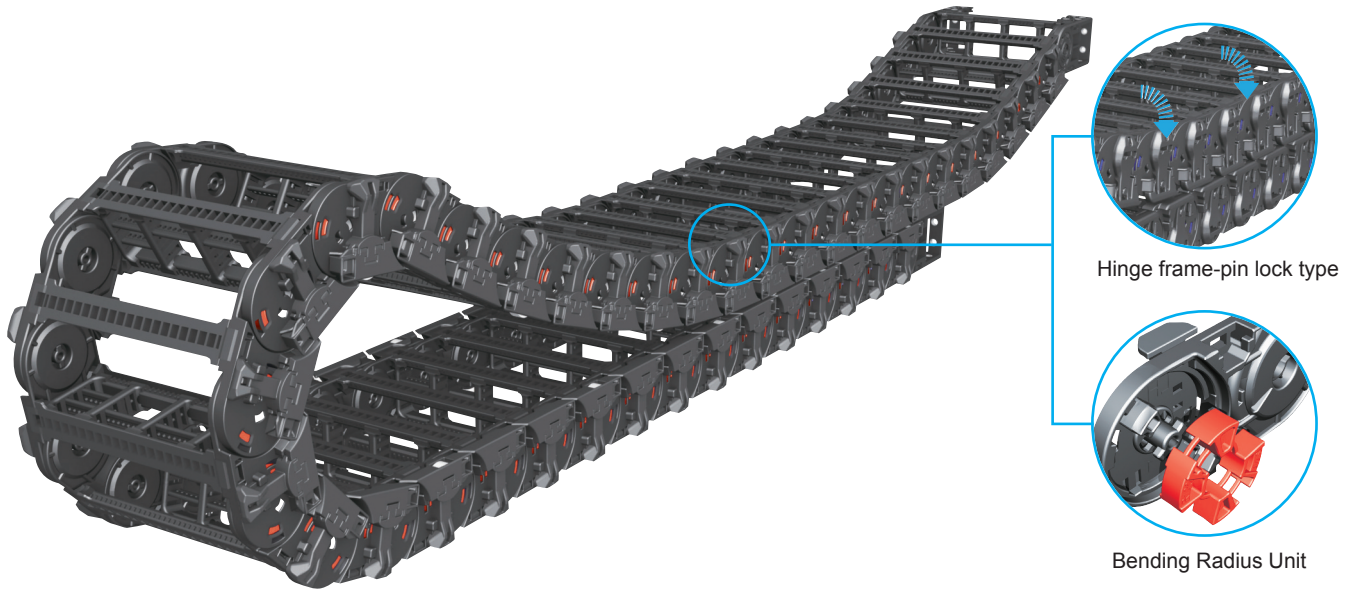


Layout of the Chain

Ls: Stroke

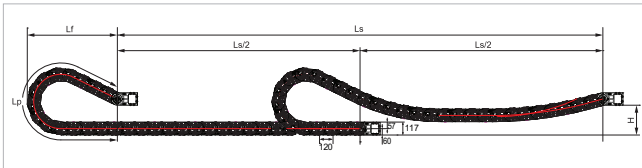


Bending Radius(R)	Lp Loop Length	Lf Loof Projection	H Moving Height
180	1,441	654	260
200	1,559	694	
250	1,864	794	
300	2,178	894	
350	2,701	1,114	
400	3,225	1,334	
500	4,062	1,654	

Chain Cross Section

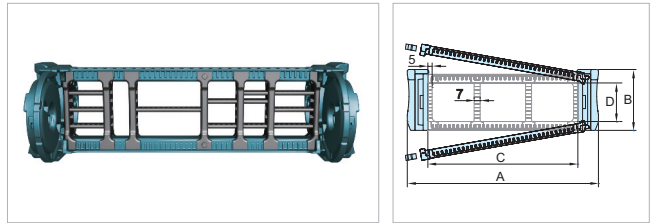


Chain Type	A Width(Outer)	B Height(Outer)	C Frame/Width(Inner)	D Height(Inner)	Weight kg/m
ST120RS	143	117	75	78	4.75
	168		100		4.87
	183		115		4.96
	193		125		5.02
	218		150		5.10
	243		175		5.28
	268		200		5.52
	308		240		5.76
	318		250		5.82
	358		290		6.16
	368		300		6.25
	418		350		6.67
	468		400		6.96
	518		450		7.42
	568		500		7.65
618	550	8.49			
668	600	8.66			


Dividers(DV)

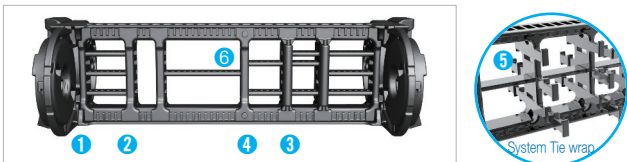

Assemble divider every second frame
 DV/T : Applied to Frame 300~600
 DV/M : Normal Divider
 DV/W : Applicable to System Tie Wrap or FEB

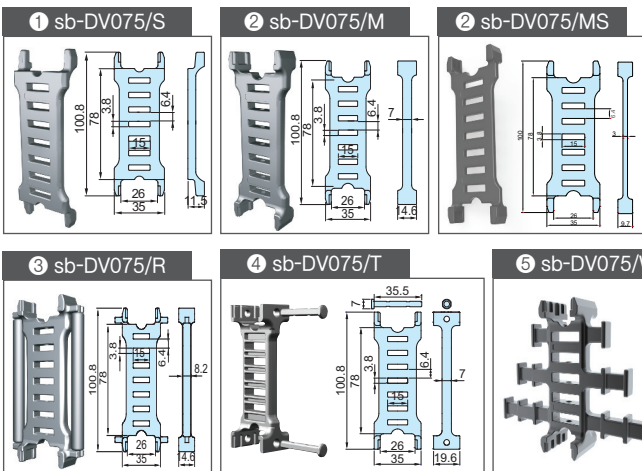

Separators(SP)

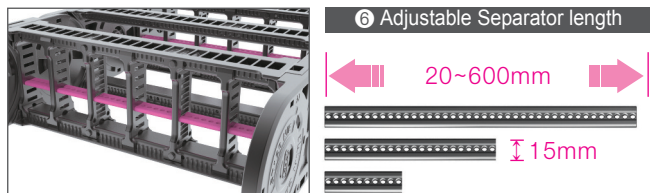

Chain Type	Ordering No.
ST120RS	sb-SP/600,Frame

