



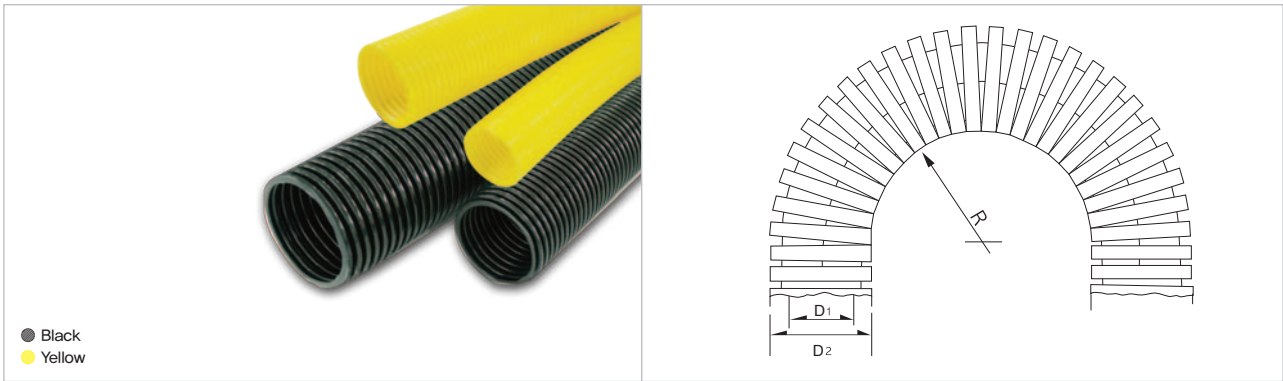

- Material : High Quality Polyamide 12 (PA12)
- Construction : Inside & Outside Corrugated Plastic Hose
- Degrees of Protection : IP68 (EN 60529)
- Temperature : -40℃ ~ +105℃
- Short Term : +130℃
- Self-Extinguishing : UL94-V2
- Color : Black, Yellow
- Connections : CPSFIX
- Application : High Speed Machine, Industrial Robot
- International Specification : UL(PART-22-48B and 22-48Y)
CE, RoHS2


Product Size

Standard Pitch : Excellent Pull-out Performance



Black	Yellow	Inner Diameter (D1)	Outer Diameter (D2)	Bending Radius(R) (R)mm± 10%	Packing meter / roll
PAR-07B	PAR-07Y	6.4	10.0	15.0	50/100
PAR-10B	PAR-10Y	9.6	13.0	20.0	50
PAR-12B	PAR-12Y	11.8	15.8	30.0	50
PAR-16B	PAR-16Y	15.9	21.2	40.0	50
PAR-22B	PAR-22Y	21.7	28.5	45.0	50
PAR-28B	PAR-28Y	27.8	34.5	55.0	50
PAR-36B	PAR-36Y	36.0	42.5	60.0	30
PAR-42B	PAR-42Y	41.5	48.5	65.0	30
PAR-48B	PAR-48Y	46.5	54.5	70.0	30
PAR-56B	PAR-56Y	56.3	67.2	110.0	30
PAR-70B	PAR-70Y	70.0	82.5	160.0	10
PAR-95B	PAR-95Y	91.5	106.0	210.0	10

Narrow Pitch(T) : Excellent Flexibility Performance




PART-22B	PART-22Y	21.7	28.5	40.0	50
PART-28B	PART-28Y	27.8	34.5	50.0	50
PART-36B	PART-36Y	36.0	42.5	55.0	30
PART-42B	PART-42Y	42.5	48.5	57.5	30
PART-48B	PART-48Y	46.5	54.5	60.0	30
PART-56B	PART-56Y	57.3	67.2	100.0	30
PART-70B	PART-70Y	72.0	82.5	150.0	10

※ Much Improved Elasticity & Flexibility compared with PAR



Roboway &
ROBO-KIT


● Black
● Yellow

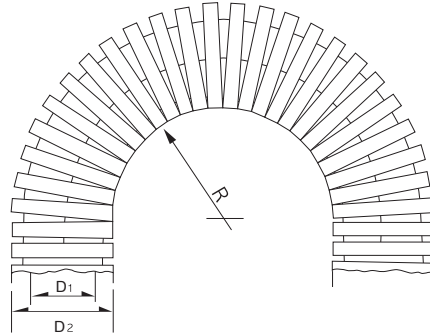

- Material : High Quality Polyamide 12 (PA12)
- Construction : Inside & Outside Corrugated Plastic Hose
- Degrees of Protection : IP 68 (EN 60529)
- Temperature : -40°C ~ +105°C
- Short Term : +130°C
- Self-Extinguishing : UL94-V2
- Color : Black, Yellow
- Connections : CPSFIX & ROBO-KIT
- Application : Industrial Robot(for Roboway)
- International Specification : CE, RoHS2


Product Size

Standard Pitch : Excellent Pull-out Performance



Black	Yellow	Inner Diameter (D1)	Outer Diameter (D2)	Bending Radius(R) (R)mm ±10%	Packing meter / roll
PAM-07B	PAM-07Y	6.4	10.0	15.0	50/100
PAM-10B	PAM-10Y	9.6	13.0	20.0	50
PAM-12B	PAM-12Y	11.8	15.8	30.0	50
PAM-16B	PAM-16Y	15.9	21.2	40.0	50
PAM-22B	PAM-22Y	21.7	28.5	45.0	50
PAM-28B	PAM-28Y	27.8	34.5	55.0	50
PAM-36B	PAM-36Y	36.0	42.5	60.0	30
PAM-42B	PAM-42Y	41.5	48.5	65.0	30
PAM-48B	PAM-48Y	46.5	54.5	70.0	30
PAM-56B	PAM-56Y	56.3	67.2	110.0	30
PAM-70B	PAM-70Y	70.0	82.5	160.0	10
PAM-95B	PAM-95Y	91.5	106.0	210.0	10

Narrow Pitch(T) : Excellent Flexibility Performance



PAMT-22B	PAMT-22Y	21.7	28.5	40.0	50
PAMT-28B	PAMT-28Y	27.8	34.5	50.0	50
PAMT-36B	PAMT-36Y	36.0	42.5	55.0	30
PAMT-42B	PAMT-42Y	42.5	48.5	57.5	30
PAMT-48B	PAMT-48Y	46.5	54.5	60.0	30
PAMT-56B	PAMT-56Y	57.3	67.2	100.0	30
PAMT-70B	PAMT-70Y	72.1	82.5	150.0	10